


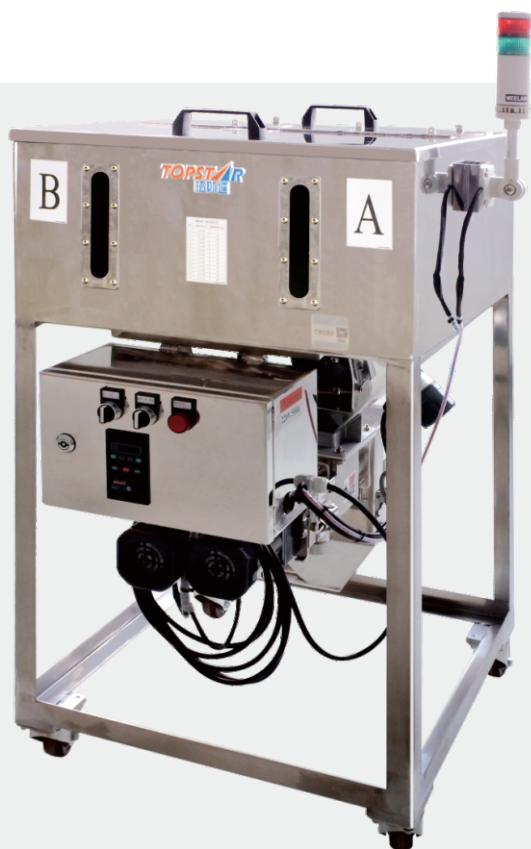


混合比例料箱TMT

TMT Mix Tank

TMT

混合比例料箱TMT TMT Mix Tank

TMT

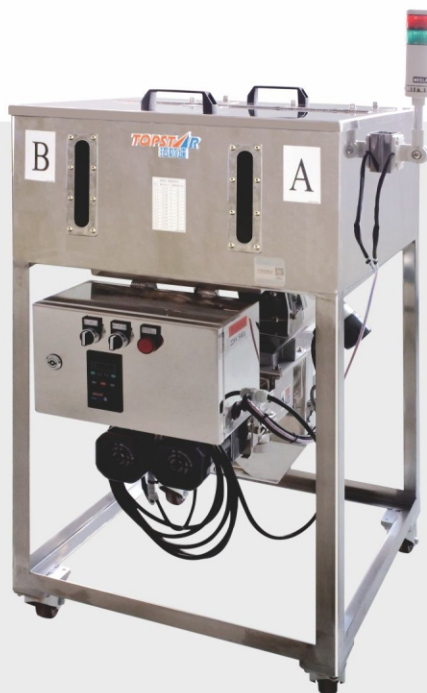


● 特点 Features

- 两种物料的存贮，同时设有计量配比功能（大部分用于新料与粉碎料的场合）。
- 计量螺杆SUS304材质，新料定速，粉碎材调速。
- 粉碎料对新料配比范围：5%～70%。
- 配比精度±2%。
- 操作简单,直接调整粉碎材的数显转速表。

- Storage of two materials, also has volumetric dosing function(use most occasion for virgin and regrind)
- SUS304 screw, fixed speed for virgin, adjustable speed for regrind.
- Regrind ratio range to virgin: 5% ~ 70%.
- Ratio precision ± 2%.
- Easy operation, digital speed-meter for adjusting regrind directly.

● 产品结构图 Product Structure Diagram

产品型号MODEL	TMT-50×50	TMT-100×100	TMT-120×30	TMT-150×150	TMT-250×250
A(mm)	695	952	948	1100	1292
B(mm)	607	862	857	1008	1202
C(mm)	1200	1434	1172	1408	1560
D(mm)	1080	1324	1132	1368	1491

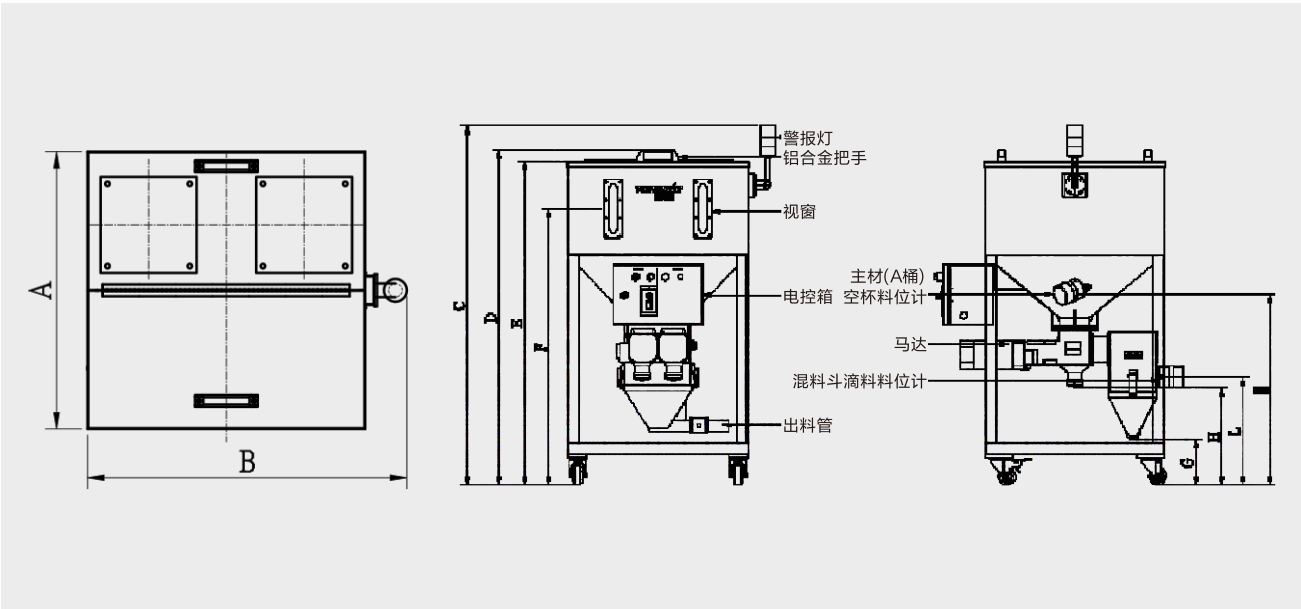

● 规格表 Specification Sheet

产品型号 MODEL		TMT-50×50	TMT-100×100	TMT-120×30	TMT-150×150	TMT-250×250
新料贮存容量(kg)Capacity of material(kg)		50	100	120	150	250
粉碎料贮存容量(kg)capacity of regrind(kg)		50	100	30	150	250
新料计量能力(连续运转时)Delivery capacity of material(continuous)		290				
粉碎料计量能力(连续运转时)Delivery capacity of regrind(continuous)		14.5~203				
配比精度 commercial mix precision		±2%				
电源 power	主回路电压 main current power	AC200V/220V 50Hz 1P 2W+E(标准电压)(standard voltage)				
	控制回路电压 control current voltage	AC200V/220V 50Hz 1P 2W+E				
	总电气容量 (kW)Total electric capacity	0.15				
电源线 powerline		5				
重量 weight(kg)		50	60	60	70	100
外形尺寸(mm)(长×宽×高) dimensions(mm)(L×W×H)		695×607×1200	952×862×1434	948×857×1172	1100×1008×1408	1292×1202×1560

注：产品规格若有变更，恕不另行通知 We reserve right to change specifications without prior notice

有关产品性质和适用范围的说明并不保证产品属性，仅作可供了解的信息。我们的供货范围及提供的服务完全以合同条款为准绳。技术数据和插图仅作为供货参考。保留更改权利。

Feature and scope of the product does not guarantee the product attributes, only for reference. Our scope of delivery and services provided are based solely on the terms of delivery and services provided are based solely on the terms of the contract. Technical data and illustration are only for reference. We reserve the rights of changing.

TSD-2021-12

广东拓斯达科技股份有限公司

GUANGDONG TOPSTAR TECHNOLOGY CO.,LTD.

地址：广东省东莞市大岭山镇大塘朗创新路2号

ADD : No.2 Chuangxin Road, Datanglang, Dalingshan Town, Dongguan City, Guangdong Province.

电话/TEL: 0769-8305 0999 传真/FAX: 0769-8584 5562

全国统一客服热线 Domestic Service Hotline **400-096-8005**

